

THE ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

PATENT  
Express Mail No.: EM397599217US  
Case Docket No.: A05.101  
Date: February 10, 1998

A

Sir:

Transmitted herewith for filing Under the Provisions of 37 CFR 1.41 (c) is the patent application of:

Inventor(s): Steven R. Vektorino, James V. Platt, and Douglass A. Springer

For: RENEWABLE ENERGY FLASHLIGHT

Enclosed are:

[X] 4 sheets of drawing s.

[X] Verified statement to establish small entity status under 7 CFR 1.9 and 37 CFR 1.27

[X] A declaration and power of attorney.

The filing has been calculated as shown below:

SMALL  
ENTITY

(Col. 1) (Col. 2)

FOR:	NO. FILED	NO. EXTRA
BASIC FEE	//////// /////	/////
TOTAL CLAIMS	21- 20 =	1
INDEP CLAIMS	1- 3 =	0
MULTIPLE DEPENDENT CLAIM PRESENTED		0

RATE	FEE
// ////	\$395
x 11=	\$11
x 41=	\$0.00
x 135 =	\$0.00

\*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

TOTAL \$ 406

[ ] Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$\_\_\_\_\_.

[X] A duplicate of this sheet is attached.

[X] A check in the amount of \$ ~~446~~ <sup>425</sup> is enclosed to cover the filing fee and the assignment fee.

[X] The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No. 02-0725.

[X] Recognizing that Internet communications are not secured, I hereby authorize the PTO to communicate with me concerning any subject matter of this application by electronic mail. I understand that a copy of these communications will be made of record in the application file.

Jennifer L. Bales  
2769 Iris Avenue, Suite 110  
Boulder, Colorado 80304  
(303) 417-1620  
e-mail: bales@mbj-law.com

Respectfully Submitted,

*Jennifer L. Bales*

Jennifer L. Bales, Attorney  
Registration No. 38,070

RENEWABLE ENERGY FLASHLIGHT

This application claims the benefit of both U.S. Provisional Application Number 60/048,485, filed on June 3, 1997, and U.S. Provisional Application Number 60/048,502, filed on June 3, 1997.

5

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION:

The present invention relates to a renewable energy flashlight.

DESCRIPTION OF THE PRIOR ART:

Flashlights are extremely useful as portable lighting devices.  
10 However, several features of conventional flashlights limit their usefulness. Flashlights are commonly needed in emergencies, such as when the owner's car breaks down or the owner's electricity goes out. But there is no guarantee that when the emergency occurs, the flashlight will work. Currently, most flashlights use batteries, which  
15 rely on chemical reactions and therefore have limited useful life, as

well as limited storage life. So, even if the flashlight was put in a drawer with fresh batteries, it may not work three years later when it is needed. Batteries can also cause corrosion due to leakage, rendering the flashlight unusable, even with fresh batteries. Further, most  
5 flashlights use incandescent lamps, which are prone to filament damage from shock, such as from being dropped. Incandescent lamps also burn out.

A second concern with conventional flashlights is how wasteful they are, both in the environmental sense and in a financial sense.  
10 Batteries are rapidly becoming a hazard to our environment due to their current methods of disposal. Also, they are expensive, and have to be replaced frequently.

A need remains in the art for a renewable energy flashlight that always works, even after being dropped or left in the car for years,  
15 without requiring batteries or incandescent lamps.

### SUMMARY OF THE INVENTION

It is an object of the present invention to provide a renewable energy flashlight that always works, even after being dropped or left in

the car for years, without requiring batteries or incandescent lamps.

The renewable energy flashlight of the present invention utilizes a magnet, which is oscillated through a coil of wire by shaking the flashlight, to generate electricity for charging a capacitor to power a light emitting diode.

The renewable energy flashlight comprises an elongated housing forming an opening at one end, a barrel assembly located within the housing which includes a hollow elongated barrel disposed within the housing, a wire coil wrapped around the barrel and disposed between the barrel and the housing, a magnet disposed within the barrel and sized to freely oscillate within the barrel when the barrel is shaken, two springs attached within the barrel and at either end of the barrel to cause the magnet to recoil when the magnet strikes the springs, wherein the magnet oscillates within the barrel when the barrel is shaken, whereby the magnet passes back and forth through the wire coil and causes current to flow within the coil. The flashlight also includes an electronics assembly located within the housing, including a capacitor for storing charge, a rectifier connected to the capacitor, means for conducting current flowing in the wire coil to the rectifier,

which rectifies the current and provides rectified current to the capacitor, charging the capacitor, a light emitting diode (LED) located near the housing opening, and switch means for selectively connecting the charged capacitor to the LED, whereby the LED selectively lights up.

5           As a feature, the flashlight includes an LED protecting diode connected between the LED and the capacitor, for protecting the LED from high voltage surges. A resistor and a capacitor protecting diode connected between the LED and the capacitor, protect the capacitor from sustained overvoltage conditions. The LED protecting diode and  
10           the capacitor protecting diode are zener diodes.

          The switch comprises a reed switch located within the housing, and a selectively movable magnet located external to the housing for activating the reed switch. Generally the charging magnet and the switch magnet are neodymium magnets. The wire coil is formed of  
15           magnet wire, and the housing and the barrel are formed of plastic. The springs are formed of stainless steel.

          The flashlight also includes a lens affixed within the housing opening adjacent to the LED, for collecting and projecting light from

the LED into a beam. The lens and the housing are hermetically sealed. This forms a hermetically sealed compartment containing the electronics assembly and the barrel assembly, making the flashlight explosion proof.

5           In general, the lens is located less than its focal distance away from the LED, whereby the light from the LED forms a slightly expanding beam.

#### BRIEF DESCRIPTION OF THE DRAWINGS

10           Figure 1 is a cutaway side view depicting the preferred embodiment of the flashlight.

Figure 2 is a cross section of the flashlight of Figure 1, taken along section A-A.

Figure 3 is a cross sectional view of the barrel of the flashlight of Figures 1 and 2.

15           Figures 4a, 4b and 4c are detailed cutaway views showing the switch of the flashlight of Figure 1.

Figure 5 is a schematic diagram showing the electrical circuit of the flashlight of Figure 1.

Figures 6a, 6b and 6c are waveform diagrams showing voltage waveforms at specific points in the circuit of Figure 5.

5

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Figure 1 is a cutaway side view depicting the preferred embodiment of flashlight 100. Figure 2 shows a cross sectional view of flashlight 100, taken along A-A. Electricity is generated when flashlight 100 is shaken longitudinally, which causes charging magnet 12 to slide back and forth inside barrel 14, and thus through wire coil 18, which is wound around barrel 14. Magnet 12 bounces between springs 16, which conserve energy while changing the direction of magnet 12. As magnet 12 passes through wire coil 18, a sinusoidal voltage wave is created between two wires 19 exiting coil 18, as shown in Figure 4a, thus generating an alternating current. Each sinusoidal wave is converted into a pair of positive going waves by bridge rectifier 20, as shown in Figure 4b. These positive waves charge gold capacitor 22, which accumulates charge with each pass of

magnet 12, as shown in Figures 4b and 4c. Charged gold capacitor 22 supplies energy to high intensity light emitting diode (LED) 23, coupled via a reed switch 26. LED protection zener diode 24 protects high intensity LED 23 from excessive voltage surges. Lens 36 collects light from high intensity LED 23 and focuses the light beam.

Housing 10 is sized to contain the mechanical, electrical, and optical components of flashlight 100. Housing 10 is preferably formed of plastic with an inside diameter of 1.270 inches and a wall thickness of 0.100 inches. It is nonmetallic to prevent eddy currents from forming in housing 10, which would slow charging magnet 12 during its travel through barrel 14. A means for sealing lens 36 and capping the end opposite lens 36 is provided to maintain a watertight and explosion proof seal (i.e. flashlight 100 can be used in an explosive environment, as it will not generate sparks which could ignite natural gas, for example).

Charging magnet 12 is preferably composed of three neodymium disc magnets stacked to form one magnet having poles on opposite ends of its cylindrical body. Neodymium magnets are preferred due to their high magnetic field strength. The individual magnets are 0.75 inches in



diameter and 0.375 inches thick, and are stacked end to end to form one magnet array 1.125 inches long. The size of charging magnet 12 determines the current output and rate of charge. A larger charging magnet diameter can provide higher current. A longer charging magnet will provide longer current pulses. A length-to-diameter ratio of one and a half or more is recommended to maintain proper alignment in barrel 14.

Lens 36 is attached to housing 10 by lens retainer 44, which threads onto housing 10. Lens sealing o-rings 38 are formed of a pliable material such as silicone. Two lens sealing rings 38 are used, one on each side of lens 36. They provide a hermetic seal between housing 10 and lens 36, and cushion lens 36 from shock and stress. Lens retainer o-ring 42 provides a seal and protects threads between lens retainer 44 and housing 10. Note that a double hermetic seal is formed between housing 10 and lens retainer 44, both at the lens and at the joint between retainer 44 and housing 10, by use of the two lens sealing rings 38 and lens retainer o-ring 42. The internal o-ring 38 acts as a secondary seal behind o-ring 42 and external o-ring 38.

Lens 36 has a focal length of approximately one inch. The

diameter of lens 36 is preferably about an inch and a half. Lens 36 should be sized and positioned so that nearly all of the light emitted light from LED 23 is collected by the lens. When lens 36 is located one focal length away from LED 23, the light emitted from LED is

5 collimated. Moving the lens closer to LED 23 results in an expanding beam of light, which is the preferred position of the lens. Moving lens 36 farther away from LED 23 results in a converging beam of light. Lens 36 may be glass, but preferably is formed of an unbreakable optical material such as polycarbonate plastic. The curvature of lens

10 36 helps provide pressure resistance for underwater applications.

Figure 3 shows barrel 14 and electronics assembly 21.

Electronics assembly 21 may be disposed within barrel 14, as shown, or may be located within housing 10, beyond barrel 14. Barrel 14 is made from a hard nonmetallic substance such as plastic. It forms a

15 spool 34 for winding wire coil 18, serves as a guide for magnet 12, and houses the electronic components. Spool 34 for winding wire coil 18 is created by reducing the outside diameter of barrel 14 midway along magnet 12's travel path. Barrel 14 has a longitudinal bore having a diameter slightly larger than that of magnet 12, to reduce air

compression and reduce friction by minimizing wall contact with magnet 12. Clearance would preferably be around 0.020 inches. The length of the longitudinal bore in barrel 14 should be approximately five times the length of magnet 12 plus the length of two springs 16.

- 5 This allows both polarities of the magnetic field to pass completely through wire coil 18, thus avoiding an overlapping condition of current waves during consecutive passes.

- 10 Springs 16 are preferably formed of stainless steel, and have enough resiliency to prevent “bottoming” of magnet 12. Stainless steel should be used because of its antimagnetic property. Springs 16 are not absolutely required for operation, but they do assist in conservation of energy by rebounding magnet 12.

- 15 Wire coil 18 is formed of insulated copper magnet wire. The preferred wire gauge is AWG #30. Wire coil 18 is optimized for the desired application by carefully selecting the wire gauge and coil geometry. Altering the wire gauge changes the voltage generated by the wire coil. As the wire is made smaller, more turns may occupy the same area, resulting in increased voltage with a reduction of current as a consequence.

With regard to the geometry of wire coil 18, the inside portion of wire coil 18 must be as close to magnet 12 as possible, meaning that the thickness of the barrel wall at spool 34 must be very thin, around 0.05 inches, to keep the coil in the highest magnetic density region of the passing magnetic field. The diameter of barrel 14 is about 0.88 inches. The outside portion of wire coil 18 is limited by the strength of magnet 12 and the bore of barrel 14, because magnetic field strength drops off rapidly as distance from the magnet increases. The length of coil 18 should be close to length of magnet 12. If coil 18 is shorter than magnet 12, there is a loss of efficiency, because the magnetic field is being cut by the coil less of the time. If coil 18 is longer than magnet 12, both magnetic fields will be cut by the coil at the same time, canceling the current during this time.

In the preferred embodiment, the dimensions of coil 18 are 1.125 inches long, 0.88 inches inside diameter, and 1.25 inches outside diameter. Such a coil will require approximately 2000 turns of AWG #30 magnet wire with an approximate length of 200 yards.

Figure 5 shows electronics assembly 21 in greater detail. Wires 19 connect wire coil 18 to bridge rectifier 20. Wires 19 may simply be

the same wire used in coil 18, extended beyond the coil and terminated at bridge rectifier 20 during assembly.

Bridge rectifier 20 is a conventional bridge rectifier with four diodes 29. The AC inputs are connected to wires 19 from coil 18, and the DC outputs are connected to capacitor 22 in the standard configuration, rectifier positive to capacitor positive and rectifier negative to capacitor negative. Bridge rectifier 20 may be built using discrete diodes 29, or a conventional modular bridge rectifier may be used.

Gold capacitor 22 is preferably a microcomputer CMOS memory backup gold capacitor. In the preferred embodiment, capacitor 22 is 1.0 Farad with a rated voltage of 5.5 WVDC (working volts D.C.). If a larger capacitor is used, the time of shaking required to charge the capacitor is longer, and so is the amount of energy that can be stored.

LED protection zener diode 24 protects LED 23 from excessive forward voltage. The zener voltage is selected to not exceed the maximum forward voltage of LED 23. Capacitor protection zener diode 27 and current limiting resistor 25 protect capacitor 22 from

overvoltage for extended periods of time. The zener voltage is selected to be slightly less than the maximum voltage rating of capacitor 22. The resistor is selected to bleed excess voltage from capacitor 22 while having minimal effect on charging pulses.

5            Reed switch 26 is single pole single throw with low resistance contacts made for low voltages at low currents. It is placed in series with the load to provide a means of connecting LED 23 to capacitor 22 to generate light. Reed switch 26 disconnects LED 23 from capacitor 22 when light is not required, conserving energy in capacitor 22. LED 10    26 should be disconnected from capacitor 22 during shaking in order to store energy in capacitor 22 more efficiently. LED 26 may be left connected to capacitor 22 during shaking, to provide a flashing effect.

            Reed switch 26 is mounted in barrel 14 in a position very close to the inside wall of housing 10 when barrel 14 is installed. Barrel 14 15    must be properly oriented, by rotating it, within housing 10 to assure alignment of Reed switch 26 and actuating magnet 30. After proper alignment is obtained, barrel 14 is glued or otherwise secured into housing 10.

Reed switch 26 must be properly oriented, in order to prevent charging magnet 12 from affecting it. Reed switch 26 must be oriented with its long axis perpendicular to the axis of charging magnet 12. It is spaced apart from this axis, but centered with relation to it (put  
5 another way, reed switch 26 is parallel to a plane through the center of charging magnet 12).

Figures 4a, 4b, and 4c show the operation of reed switch 26 in detail. Figure 4a shows reed switch 26 in the open position, and Figure  
10 4c shows reed switch 26 in the closed position. Figure 4b shows the reed switch and magnet assembly as viewed from the end of flashlight 100. Switch activating magnet 30 is preferably a small neodymium magnet, 0.25 inches in diameter, 1/8 inch thick, with poles on opposite ends of its cylindrical shape. Switch activating magnet 30 is captivated by switch slide 28, which is retained by switch retainer 32.  
15 Switch activating magnet 30, switch slide 28 and switch retainer 32 are inserted into a pocket in housing 10 adjacent to reed switch 26. Reed switch 26 will be off when switch activating magnet 30 is directly over it. In this position it is effectively immune to the magnetic field of charging magnet 12. Reed switch 26 will turn on

when switch activating magnet 30 is moved approximately 0.1 inch from the off position.

Alternatively, switch activating magnet 30 may also be placed so that in its first position, it is a sufficient distance away from reed switch 26 for reed switch 26 to be off, and in its second position, it is moved closer to reed switch 26 so that reed switch 26 turns on.

Figure 6a shows a voltage waveform across wire coil 18. The waveform is sinusoidal, with gaps between the sine waves when the magnet is away from coil 18. The amplitude and frequency of the sine wave will vary depending upon the speed at which charging magnet 12 passes through coil 18.

Figure 6b shows the voltage across capacitor 22 (due to the rectified current provided by rectifier 20). The underlying voltage of capacitor 22 rises with time as flashlight 100 is shaken.

Figure 6c shows the voltage across capacitor 22 after flashlight 100 has been shaken sufficiently to charge up capacitor 22. At this point, capacitor protection zener diode 27 and current limiting resistor 25 bleed voltage from capacitor 22, preventing overcharging of



capacitor 22.

While the exemplary preferred embodiments of the present invention are described herein with particularity, those skilled in the art will appreciate various changes, additions, and applications other than those specifically mentioned, which are within the spirit of this invention.

What is claimed is:

## CLAIMS

1. A renewable energy flashlight comprising:  
an elongated housing forming an opening at one end;  
a barrel assembly located within the housing including:  
a hollow elongated barrel disposed within the housing,  
5 a wire coil wrapped around the barrel and disposed between the  
barrel and the housing,  
a charging magnet disposed within the barrel and sized to freely  
oscillate within the barrel when the barrel is shaken,  
two springs attached within the barrel and at either end of the  
10 barrel to cause the magnet to recoil when the magnet  
strikes the springs,  
wherein the charging magnet oscillates within the barrel when  
the barrel is shaken, whereby the charging magnet passes  
back and forth through the wire coil and causes current to  
15 flow within the coil; and  
an electronics assembly located within the housing, said electronics  
assembly including:  
a capacitor for storing charge,

a rectifier connected to the capacitor;  
20 means for conducting current flowing in the wire coil to the  
rectifier, whereby the rectifier rectifies the current, said  
rectifier providing rectified current to the capacitor,  
whereby the capacitor is charged,  
a light emitting diode (LED) located near the housing opening, and  
25 switch means for selectively connecting the charged capacitor to  
the LED, whereby the LED selectively lights up.

2. The flashlight of claim 1, further including an LED protecting diode connected between the LED and the capacitor, for protecting the LED from high voltage surges.

3. The flashlight of claim 2, further including a resistor and a capacitor protecting diode connected between the LED and the capacitor, for protecting the capacitor from sustained overvoltage conditions.

4. The flashlight of claim 3, wherein the LED protecting diode and the capacitor protecting diode are zener diodes.

5. The flashlight of claim 1, wherein the switch comprises a reed

switch located within the housing, and a selectively movable switch magnet located external to the housing for activating the reed switch.

6. The flashlight of claim 1, wherein the charging magnet is a neodymium magnet.

7. The flashlight of claim 6, wherein the coil is formed of magnet wire.

8. The flashlight of claim 7, wherein the housing and the barrel are formed of plastic.

9. The flashlight of claim 8 wherein the springs are formed of stainless steel.

10. The flashlight of claim 1, further including a lens affixed within the housing opening adjacent to the LED, for collecting and projecting LED light into a nearly collimated beam.

11. The flashlight of claim 10, further including means for hermetically sealing the housing and the lens.

12. The flashlight of claim 11, wherein the housing and the lens form

a hermetically sealed compartment containing the electronics assembly and the barrel assembly, whereby the flashlight is explosion proof.

13. The flashlight of claim 10, wherein the lens is located less than its focal distance away from the LED, whereby the light from the LED forms a slightly expanding beam.

14. The flashlight of claim 10, further including an LED protecting diode connected across the LED, for protecting the LED from high voltage surges.

15. The flashlight of claim 14, further including a resistor and a capacitor protecting diode connected across the capacitor, for protecting the capacitor from sustained overvoltage conditions.

16. The flashlight of claim 15, wherein the LED protecting diode and the capacitor protecting diode are zener diodes.

17. The flashlight of claim 10, wherein the switch comprises a reed switch located within the housing, and a selectively movable switch magnet located external to the housing for activating the reed switch.

18. The flashlight of claim 10, wherein the charging magnet is a neodymium magnet.

19. The flashlight of claim 18, wherein the coil is formed of magnet wire.

20. The flashlight of claim 19, wherein the housing and the barrel are formed of plastic.

21. The flashlight of claim 20 wherein the springs are formed of stainless steel.

## RENEWABLE ENERGY FLASHLIGHT

### ABSTRACT OF THE INVENTION

A renewable energy flashlight comprises a housing and a barrel located within the housing. The barrel has a wire coil wrapped around it, between the barrel and the housing. A magnet disposed within the barrel oscillates within the barrel when the barrel is shaken, generating an alternating current in the coil. Two springs at either end of the barrel cause the magnet to recoil when the magnet strikes the springs. An electronics assembly located within the housing includes a capacitor for storing charge, a rectifier connected to the capacitor, and means for conducting current flowing in the coil to the rectifier, to provide rectified current to the capacitor and charge the capacitor. A light emitting diode (LED) is connected to the capacitor by means of a switch, so the LED lights up when the switch is switched on.

FIG. 1


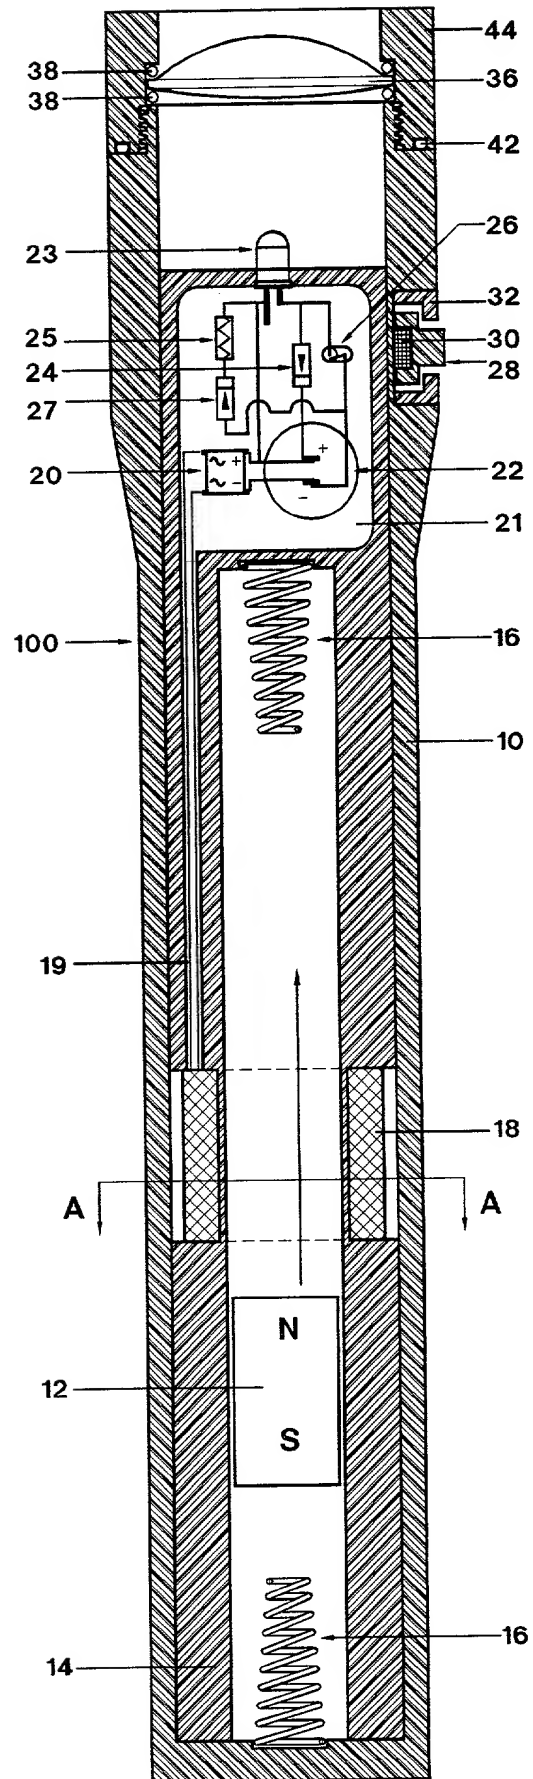


FIG. 2



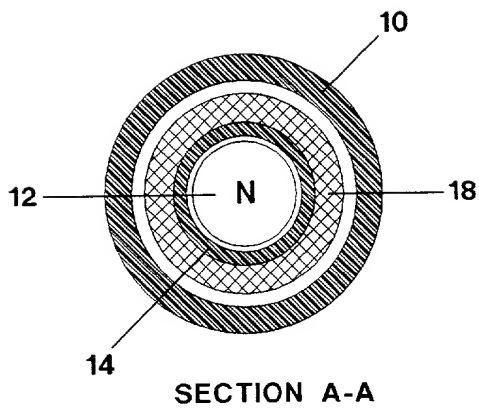

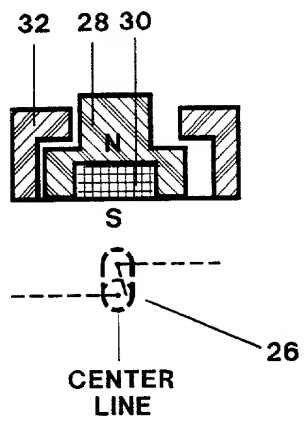
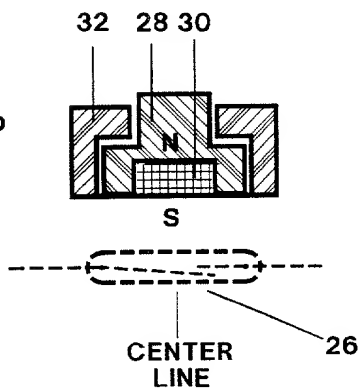
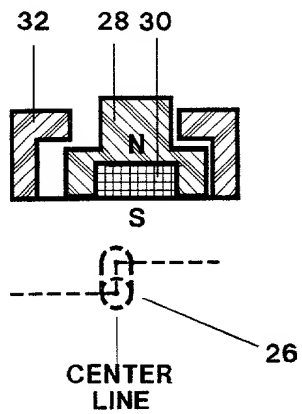
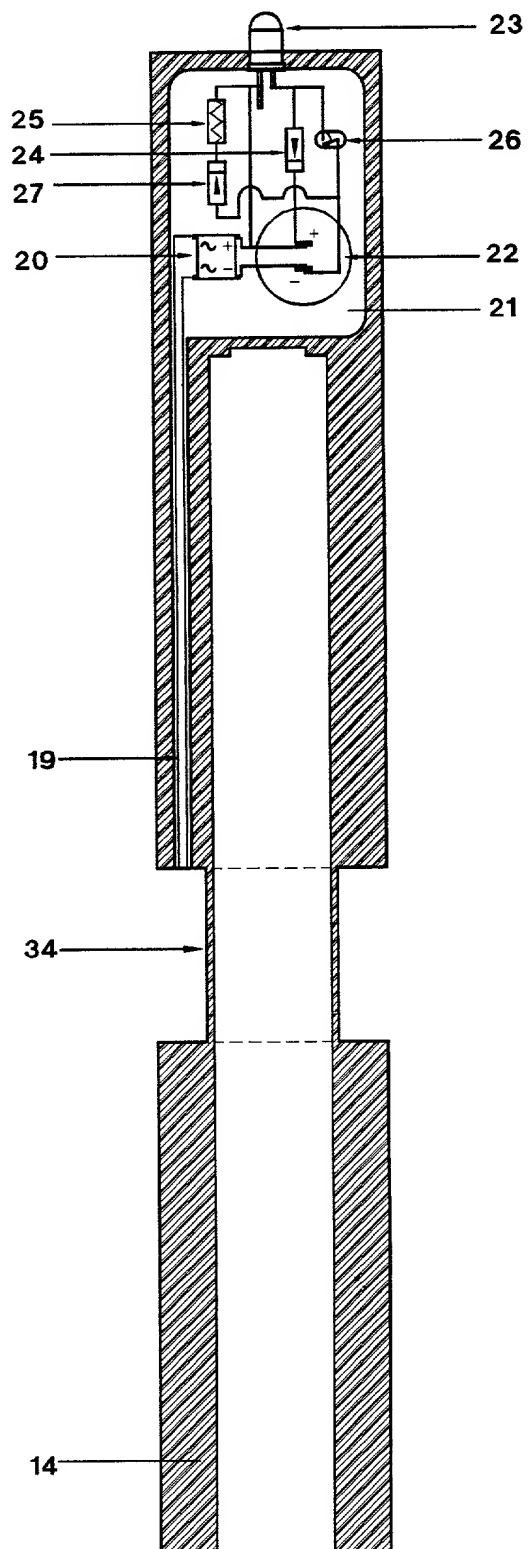
[illegible][illegible][illegible][illegible]

FIG. 5

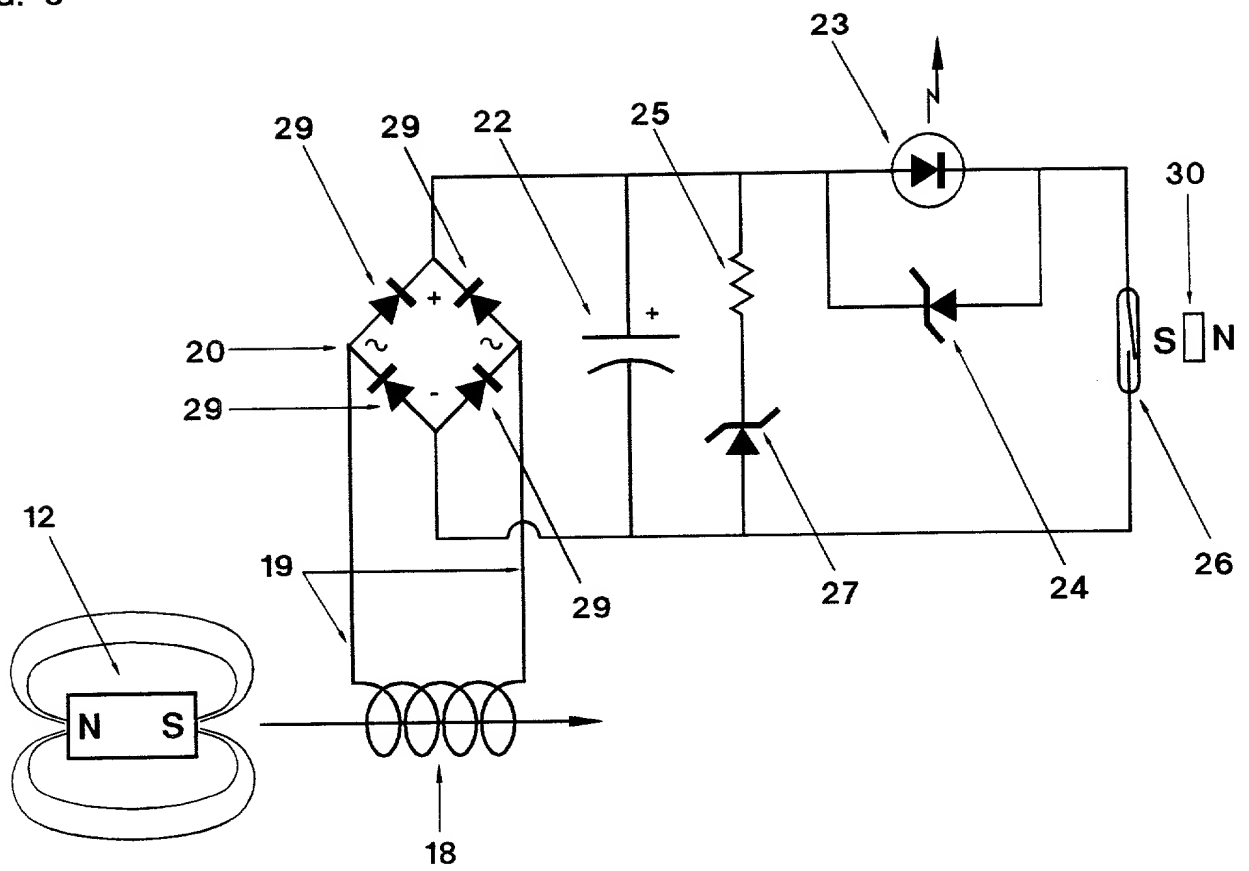


FIG. 6a

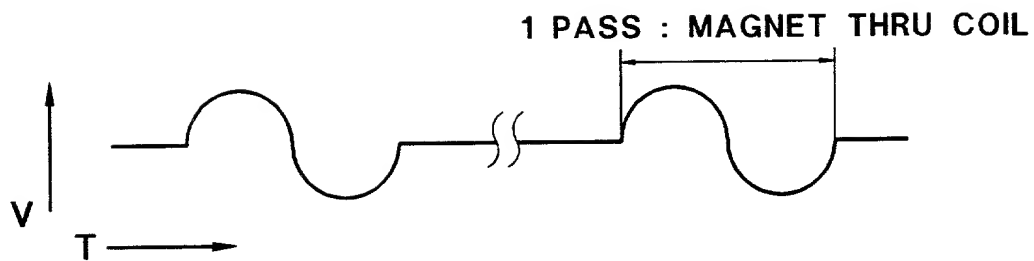


FIG. 6b


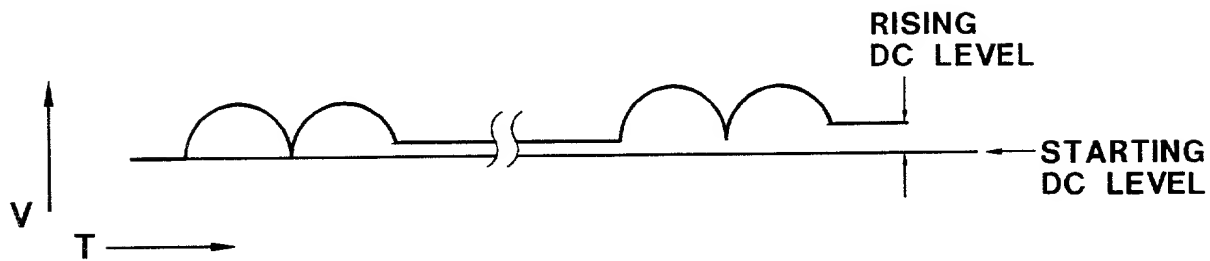


FIG. 6c

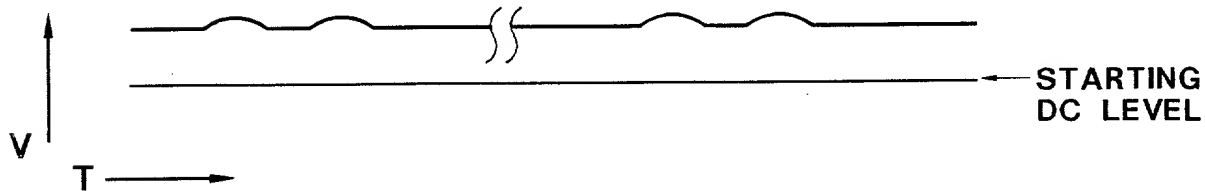

PATENT  
Express Mail No.: EM397599217US

### DECLARATION FOR PATENT APPLICATION

As the below-named inventors, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our names.

We believe we are the original, first, and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled RENEWABLE ENERGY FLASHLIGHT, the specification of which is attached hereto.

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulation, 1.56(a).

We hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Names: JENNIFER L. BALES Reg. No. 38,070  
JEAN M. MACHELEDT Reg. No. 33,956  
KRISTINE H. JOHNSON Reg. No. 36,835

Address all telephone calls to: JENNIFER BALES at (303) 417-1620

Address all correspondence to: JENNIFER L. BALES  
2769 Iris Avenue, Suite 110  
Boulder, Colorado 80304

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of joint inventor: Steven Robert Vektorino

Inventor's signature Steven Robert Vektorino

Date 2/11/98 Citizenship: U.S.

Residence 745 South Grand Avenue  
Fort Lupton, Colorado 80621

Post Office Address Same as Residence.

Full name of joint inventor: James Victor Platt

Inventor's signature James V. Platt  
Date 02/11/98 Citizenship: U.S.

Residence 5275 Dover Street  
Arvada, Colorado 80002

Post Office Address Same as Residence

Full name of joint inventor: Douglass Anderson Springer

Inventor's signature Douglass Anderson Springer  
Date 02/11/98 Citizenship: U.S.

Residence 3044 South Halifax Street  
Aurora, Colorado 80013

Post Office Address Same as Residence

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor(s): Steven R. Vettori, James V. Platt, and Douglass A. Springer

Executed: 2-11-98

For: RENEWABLE ENERGY FLASHLIGHT

Serial No.: Application filed herewith

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9 (f) and 1.27(c)) - SMALL BUSINESS CONCERN

I hereby declare that I am an official of the small business concern  
empowered to act on behalf of the concern identified below

NAME OF CONCERN:	Applied Innovative Technologies, Inc.
ADDRESS OF CONCERN:	3044 South Halifax Street Aurora, Colorado 80013

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including that of its affiliates, does not exceed five hundred persons. For purposes of this statement: (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that the rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above-identified application.

If the rights held by the above-identified small business concern are not

exclusive, each individual, concern, or organization having rights to the invention is listed below and no rights to the invention are held by any person, other than the inventor, who could not qualify as a sole inventor under 37 CFR 1.9(c), or by any concern that would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract of law to assign, grant, convey, or license any rights in the invention is listed below:

NONE

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of this application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING:	Steven Robert Vectorino
TITLE OF PERSON SIGNING OTHER THAN OWNER:	President
ADDRESS OF PERSON SIGNING:	3044 South Halifax Street Aurora, Colorado 80013

2/11/98  
Date

Steven Robert Vectorino  
Steven Robert Vectorino